


## CABLE ASSEMBLY 8V5-20

**REF DIMENSIONS ONLY.  
CONSULT FACTORY FOR ACTUAL DIMENSIONS.**



### STANDARD WIRING

PIN	WIRE
A	RED
B	BLACK
C	WHITE
D	GREEN
E	BLUE
F	BROWN

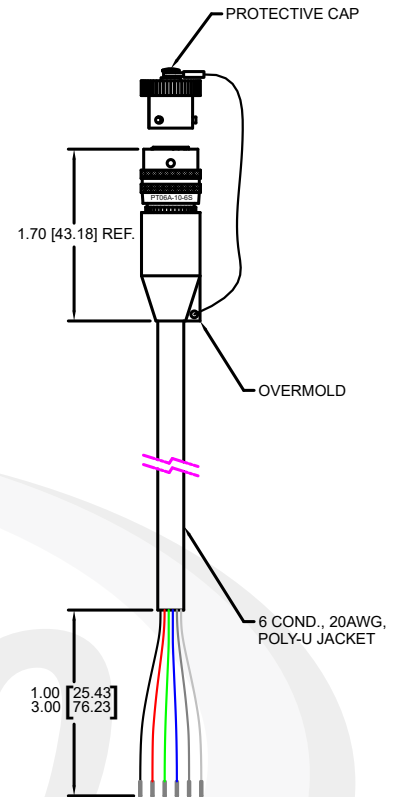

### FEATURES:

- Polyurethane jacketed cable with water tight over-mold protection
- 6 Conductor, 18 awg with foil & drain
- 6 Pin Amphenol PT06A-10-6S connector with protective cap

### SPECIFICATIONS:

#### Jacket:

- Pressure Extruded Black Polyurethane (PU)
- Wall thickness nominal .050 inches
- Outside diameter (OD) nominal .290 inches,  $\pm .010$  inches

#### Conductor (6 x 20 AWG Singles):

- 20 Gauge Tinned Copper Wire
- 10/30 Stranding

#### Insulation:

- Polypropylene (PP)
- Outside diameter (OD) nominal  $\pm 0.3$  inches

#### Conductor Color Code:

- Black, Brown, Red, Green, Blue, White
- **Rating:**
- 600 Volts
- +80 °C

**RoHS** – This product complies with Article 4 (1) of Directive 2002/95/ EC on the restriction of use of certain hazardous substances in electrical and electronic equipment.