

MODEL 313L


DIMENSIONAL DRAWING
All dimensions are in inches (mm)

SUBMERSIBLE LEVEL TRANSMITTER



STANDARD WIRING

WIRE	MODEL 313L
RED	+EXC/SIG
BLK	-EXC/SIG
GRN	N/C
WHT	N/C
SHIELD	OPEN

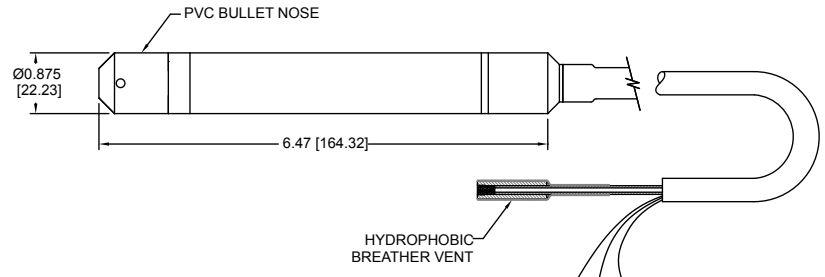

**REF DIMENSIONS ONLY.
CONSULT FACTORY FOR ACTUAL DIMENSIONS.**

PRODUCT OVERVIEW:

The Model 313L from GP:50 is a line of highly accurate and reliable submersible level transmitters. The corrosion-resistant 316L stainless steel construction, and an integrated hydrophobic breather vent help provide years of maintenance-free service.

FEATURES:

- Available ranges of 0-20" WC thru 300 PSI (50 MBAR to 21 BAR)
- Case rated to 900 feet WC (275 meters WC)
- Up to $\pm 0.10\%$ FSO accuracy
- 316L stainless steel housing with optional titanium
- Hytrel jacketed cable with optional Tefzel®
- Lightning suppression as standard

APPLICATIONS:

- Wet wells, ponds, rivers and tank level measurements
- Water treatment
- Ground water monitoring
- Dredging levels
- Shipboard level control

OPTIONS:

- Slim 0.69" (1.74 cm) diameter (Model 313S)
- Titanium construction (Model 313L-NI)
- Additional Hytrel cable and Tefzel® jacketed cable lengths
- Tapered inlet with stand-off plate for wastewater
- Remote zero and span adjustments

GP:50 MODEL 313L

REFERENCE SPECIFICATIONS

(Standard configurations shown, consult factory for other options)

ELECTRICAL	
Output Signal:	4-20 mA
Excitation Voltage:	9 to 36 Vdc
Load Resistance:	1400 Ω max. at 40 Vdc excitation
Circuit Protection:	Short circuit or reversed wired – Indefinite
Response Time:	≤5 ms to 90%

MATERIALS OF CONSTRUCTION	
Wetted Parts:	316L, PVC, neoprene, and hytel jacketed cable
Housing Sensor:	316L stainless steel, optional titanium
Cable Jacket Material:	Hytel (Tefzel optional)
Cable Seal:	Viton (Optional materials available)
Nose Cap:	PVC
Internal Fill:	Silicone (Other options available)

ACCURACY (BFSL): Hysteresis, non-Linearity & Repeatability @ +70 °F	
Standard:	±0.5% FSO
Improved:	±0.2% FSO and ±0.1% FSO
Zero & Span Balance:	±1.0% FSO @ +70 °F

MECHANICAL	
Process Connection:	PVC bullet nose
Electrical Connection:	Hytel jacketed, 4-conductor, 18 AWG with vent tube and hydrophobic filter, 8' long, other lengths available.
External Pressure:	Rated to 900 ft WC (274) meters) max.
Proof Pressure:	2X FSO
Burst Pressure:	4X FSO
Approximate Weight:	10 oz. (0.3 kg) nominal (options may increase weight)
Diameter:	0.875" (2.22 cm)

PRESSURE RANGES	
0-20" WC thru 300 PSI (50 MBAR to 21 BAR)	

THERMAL SPECIFICATIONS	
Operating Range:	-40 °F to +185 °F (-40 °C to +85 °C)
Compensated Range:	0 °F to +140 °F (-17.7 °C to +60 °C)
Storage Ambient:	-40°F to +195 °F (-40 °C to +90.6 °C)
Effect on Zero/Span:	< ±2.0% FSO/100 °F

